



US006866573B2

(12) **United States Patent**
Shefet et al.

(10) **Patent No.:** **US 6,866,573 B2**
(45) **Date of Patent:** **Mar. 15, 2005**

(54) **AUTOMATED SUPPORT MEMBER POSITIONING AND REMOVING SYSTEMS AND RELATED DEVICES AND METHODS**

(75) Inventors: **Sarid M. Shefet**, Cary, NC (US); **John Michael Phillips**, State Road, NC (US); **Frank Michael Horvath, Jr.**, Harmony, NC (US); **Richard Rodeheaver Hawkins**, Raleigh, NC (US); **Lawrence Alan Chandler**, Raleigh, NC (US)

(73) Assignee: **ConAgra Foods, Inc.**, Edina, MN (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/170,869**

(22) Filed: **Jun. 13, 2002**

(65) **Prior Publication Data**

US 2003/0190382 A1 Oct. 9, 2003

Related U.S. Application Data

(60) Provisional application No. 60/370,874, filed on Apr. 8, 2002.

(51) **Int. Cl.⁷** **A22C 11/00**

(52) **U.S. Cl.** **452/32**

(58) **Field of Search** 452/30-35, 37, 452/46, 51

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,697,850 A	12/1954	Cross	452/47
3,022,745 A	2/1962	Roberts	104/99
3,533,495 A	10/1970	Wallace		
3,964,129 A	6/1976	Townsend		
4,060,875 A	12/1977	Gosling et al.		
4,079,666 A	3/1978	Plemons et al.	99/355
4,112,546 A	9/1978	Muller		
4,129,923 A	12/1978	Hoegger	452/46
4,218,003 A	8/1980	Plewa et al.	452/31
4,233,709 A	* 11/1980	Smith et al.	452/49

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

DE	3137276	4/1983
EP	0399582	1/1990
FR	2088622	4/1970

OTHER PUBLICATIONS

- U.S. Appl. No. 10/170,887, filed Jun. 13, 2002, 9281-3.
- U.S. Appl. No. 10/170,652, filed Jun. 13, 2002, 9281-5.
- U.S. Appl. No. 10/171,864, filed Jun. 13, 2002, 9281-6.
- U.S. Appl. No. 10/170,823, filed Jun. 13, 2002, 9281-9.
- U.S. Appl. No. 10/171,862, filed Jun. 13, 2002, 9281-10.
- U.S. Appl. No. 10/171,865, filed Jun. 13, 2002, 9281-11.
- U.S. Appl. No. 10/172,331, filed Jun. 13, 2002, 9281-13.

(List continued on next page.)


Primary Examiner—Thomas Price

(74) *Attorney, Agent, or Firm*—Myers Bigel Sibley & Sajovec PA

(57) **ABSTRACT**

Methods, systems, and associated devices for supplying support members to a product loading station and automatically removing loaded members therefrom include: (a) advancing in serial order and spaced apart relationship, a plurality of elongated support members having opposing first and second ends and an associated length, along a selected travel path; (b) loading each of the elongated support members individually with a respective continuous length of multiple loops or multiple discrete lengths of elongated product at the loading station; and (c) advancing the loaded elongated support members away from the loading station along the selected travel path. The loaders may be configured with winding mechanisms that wind elongated products directly onto elongated support members, such as bars, sticks, or rods, by causing the arm to follow a repetitive motion pattern above and below the stick or rod to discharge the elongated product in a winding motion onto the bar, stick, or rod so that they loop or drape directly onto the rod, stick, bar or other desired food support is also described.

25 Claims, 15 Drawing Sheets

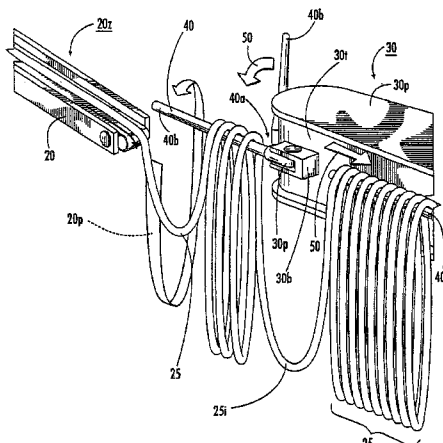

U.S. PATENT DOCUMENTS

4,547,931 A	10/1985	Staudenrausch et al.	17/1 F
4,565,282 A	1/1986	Olsson et al.	198/778
4,582,047 A	4/1986	Williams	126/369
4,612,684 A	9/1986	Kollross	452/35
4,644,607 A	2/1987	Sziede	17/45
4,682,385 A	7/1987	Kasai et al.	
4,761,654 A	8/1988	Schnell et al.	17/1 R
4,766,645 A	8/1988	Lamartino et al.	17/49
4,880,105 A	* 11/1989	Kasai et al.	198/465.4
4,997,365 A	3/1991	Lanham	432/121
5,049,108 A	9/1991	Staudenrausch	452/48
5,078,120 A	1/1992	Hwang	126/21 A
5,098,332 A	3/1992	Handel	452/46
5,277,301 A	1/1994	Fenty	198/77 B
5,354,229 A	10/1994	Markwardt et al.	452/51
5,354,230 A	10/1994	McFarlane et al.	452/51
5,480,346 A	1/1996	Kasai et al.	452/47
RE35,259 E	6/1996	Williams	126/369
5,788,563 A	8/1998	Nakamura et al.	452/47
5,830,050 A	11/1998	Nakamura et al.	452/31
5,942,265 A	8/1999	Roberds et al.	426/59
6,066,035 A	5/2000	Hergott et al.	452/31
6,071,186 A	6/2000	Shibata et al.	
6,213,368 B1	4/2001	Vermeer et al.	226/104
6,277,018 B1	8/2001	Cody et al.	452/51
6,468,143 B1	10/2002	White et al.	452/32
6,523,462 B1	* 2/2003	Johnson et al.	99/443 C
6,572,465 B2	* 6/2003	Kimura	452/51
6,592,452 B1	* 7/2003	Myers	452/51

2003/0171084 A1	9/2003	Shefet et al.	452/35
2003/0171086 A1	9/2003	Shefet et al.	452/177
2003/0171088 A1	9/2003	Shefet et al.	452/187

OTHER PUBLICATIONS

Article, "Continuous Process Systems", Alkar, <http://www.alkar.com>, date unavailable; believed to be dated before Mar. 1, 2002, pp. 1-3.

Article, "Batch Ovens", Alkar, <http://www.alkar.com> date unavailable; believed to be dated before Mar. 1, 2002, pp. 1-3.

Brochure, "Fessmann Turbomat 7000: Industrial Smoking and Cooking", Fessman Group, date unavailable; believed to be dated before Mar. 3, 2002, pp. 1-8.

Brochure, "Fessmann Smoking Cooking Cooling", Fessman Group, date unavailable; believed to be dated before Mar. 1, 2002, pp. 1-8.

Brochure, "Fessmann Transfer 4000: Continuous Smoking, Cooking and Cooling", Fessman Group, date unavailable; believed to be dated before Mar. 1, 2002, pp. 1-9.

Pictures of the inside of a conventional prior art oven from Alkar.

PCT International Search Report, International Application No. PCT/US03/04727 filed Feb. 20, 2003; mailed Dec. 5, 2003.

* cited by examiner

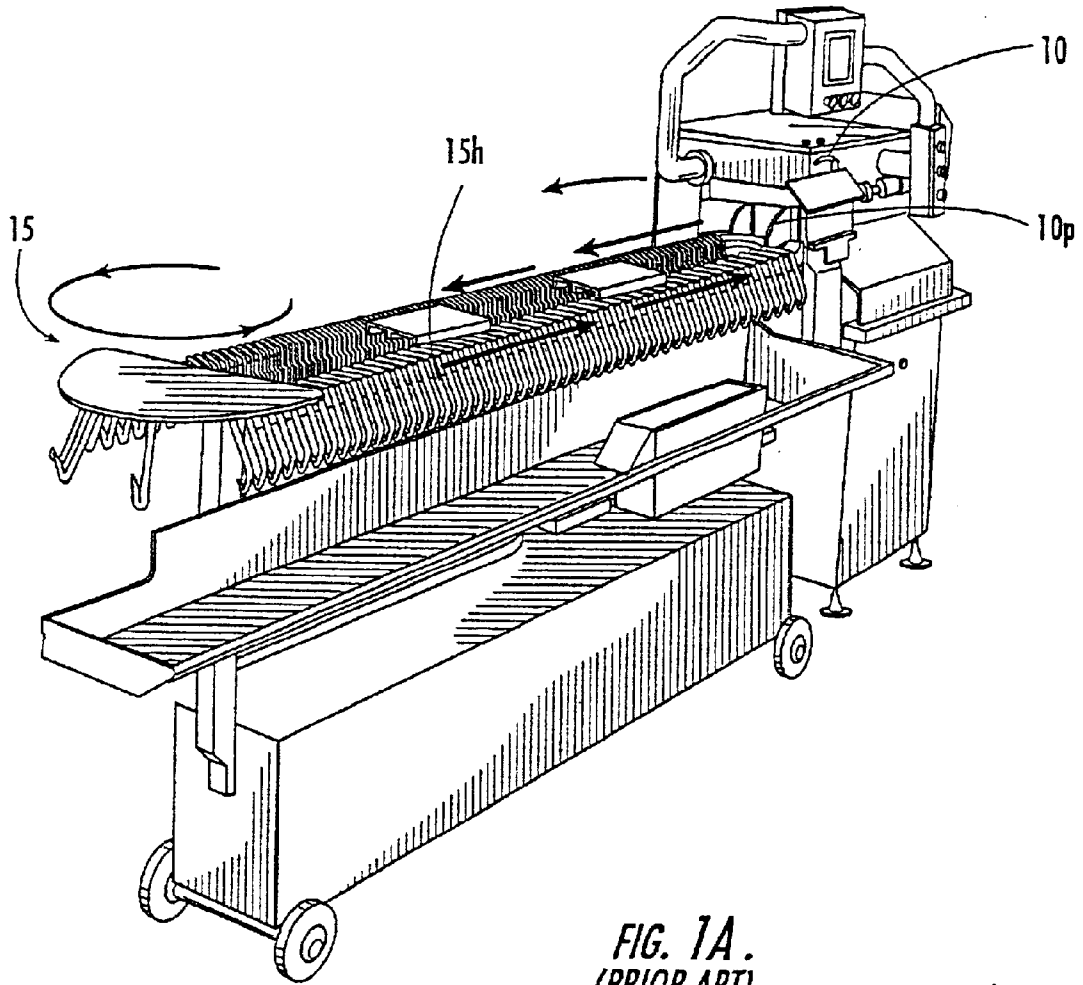


FIG. 1A.
(PRIOR ART)

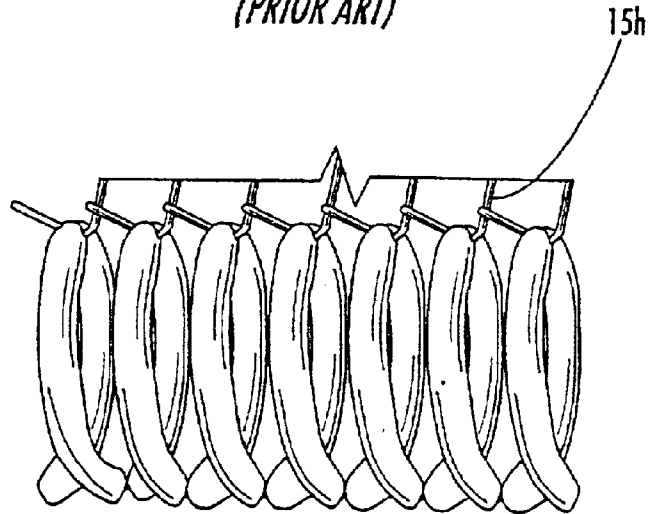
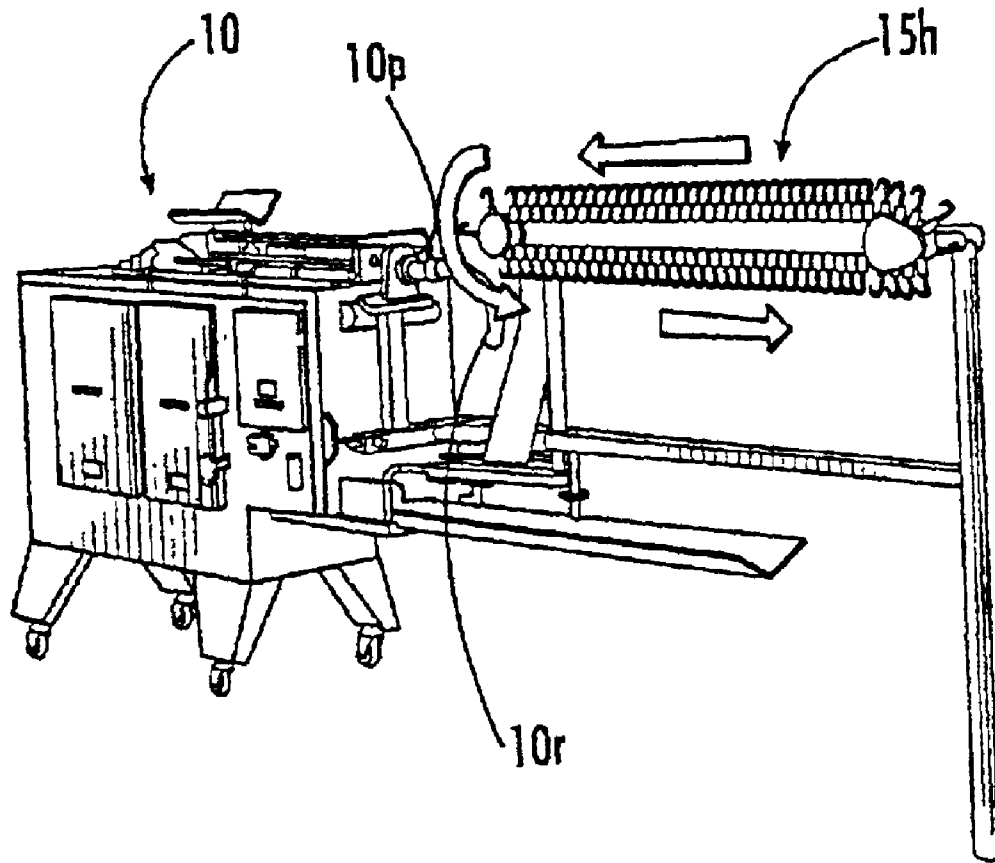


FIG. 1B.
(PRIOR ART)



*FIG. 1C.
(PRIOR ART)*

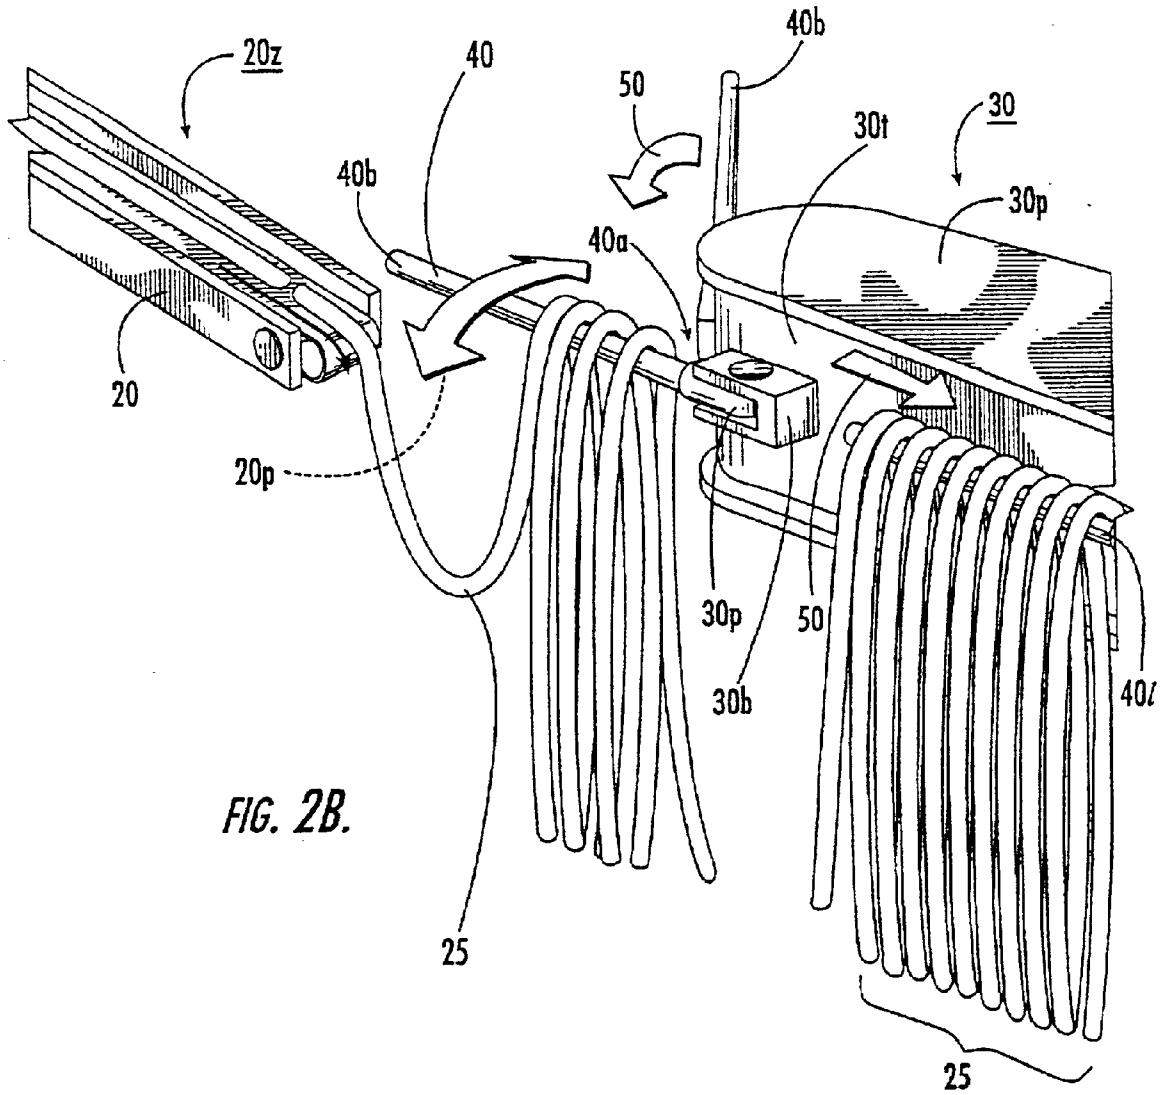


FIG. 2B.

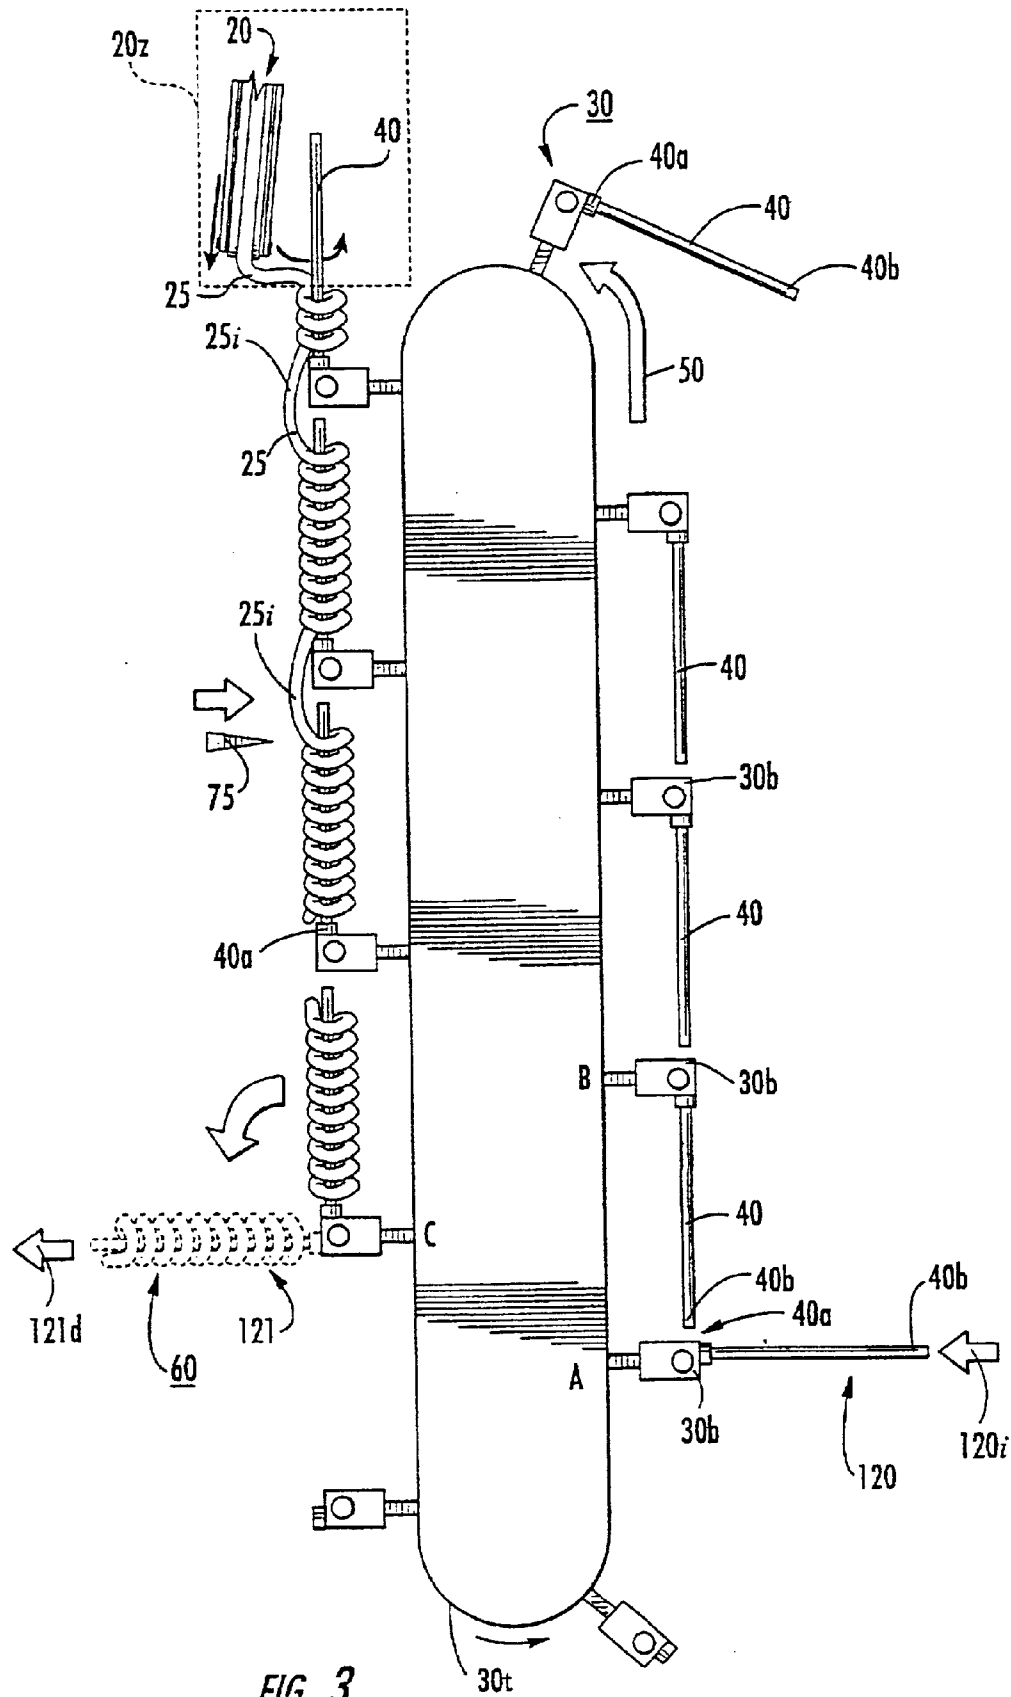


FIG. 3.

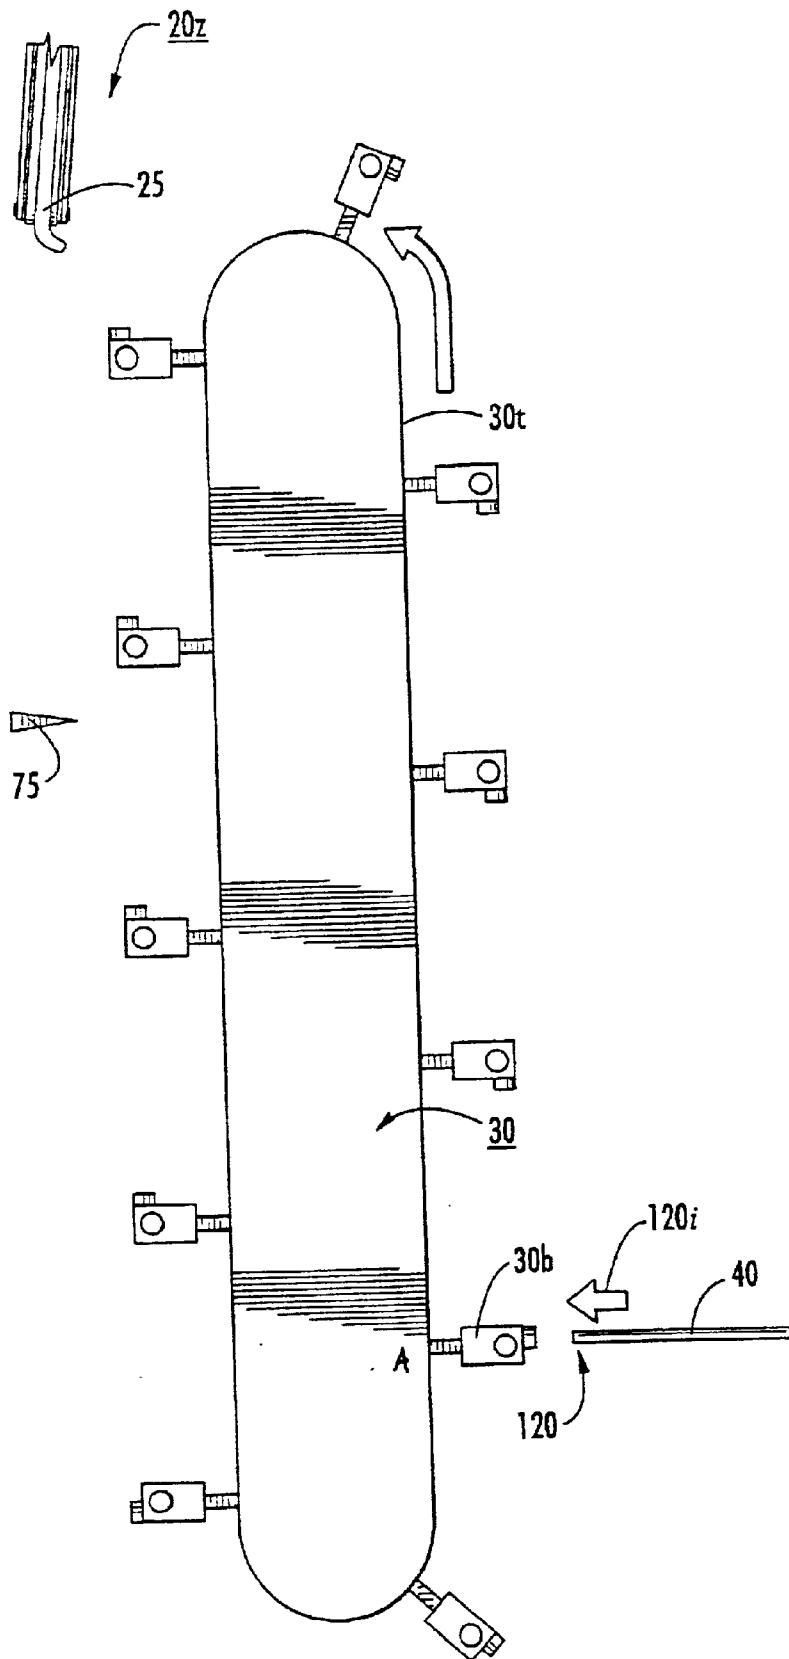


FIG. 4.

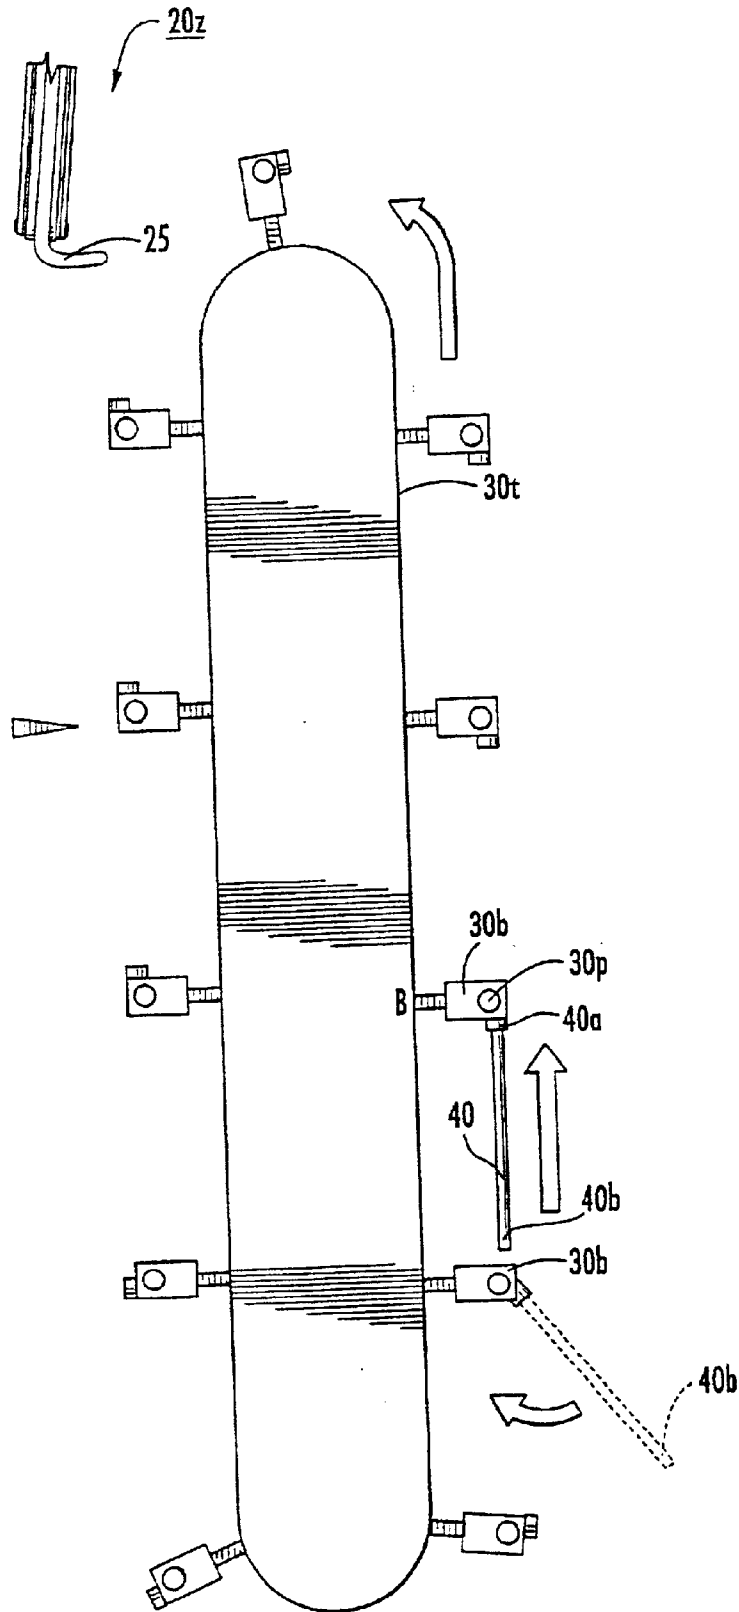


FIG. 5.

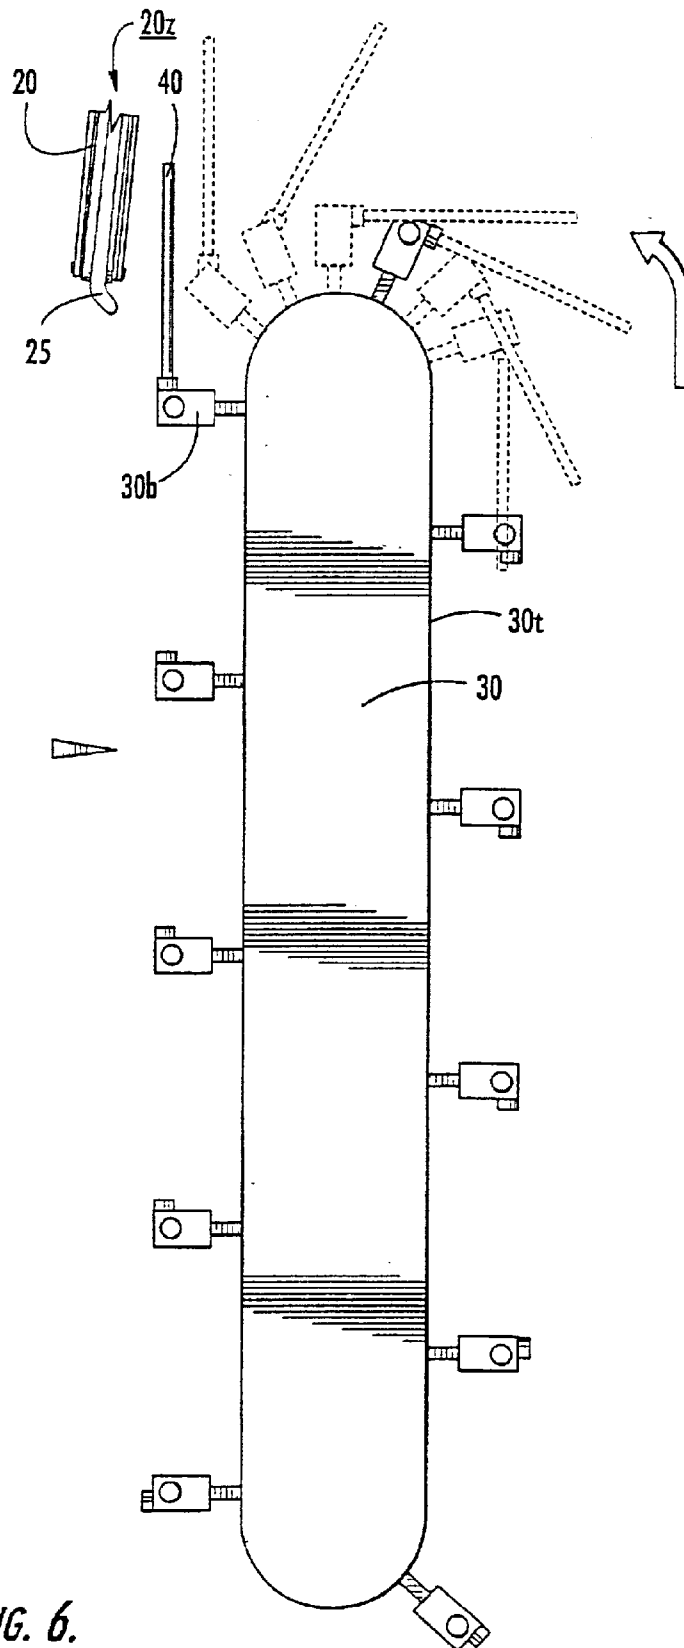


FIG. 6.

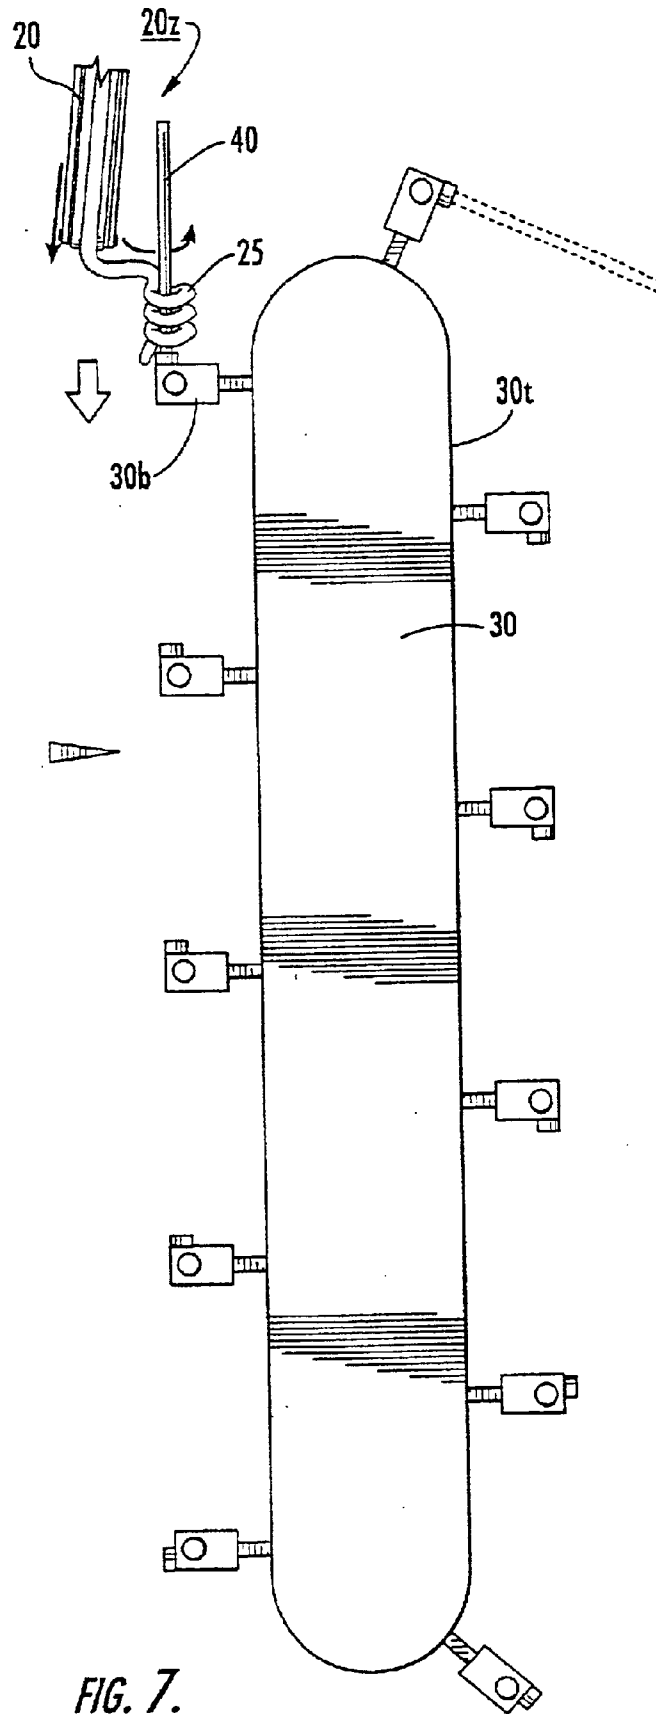


FIG. 7.

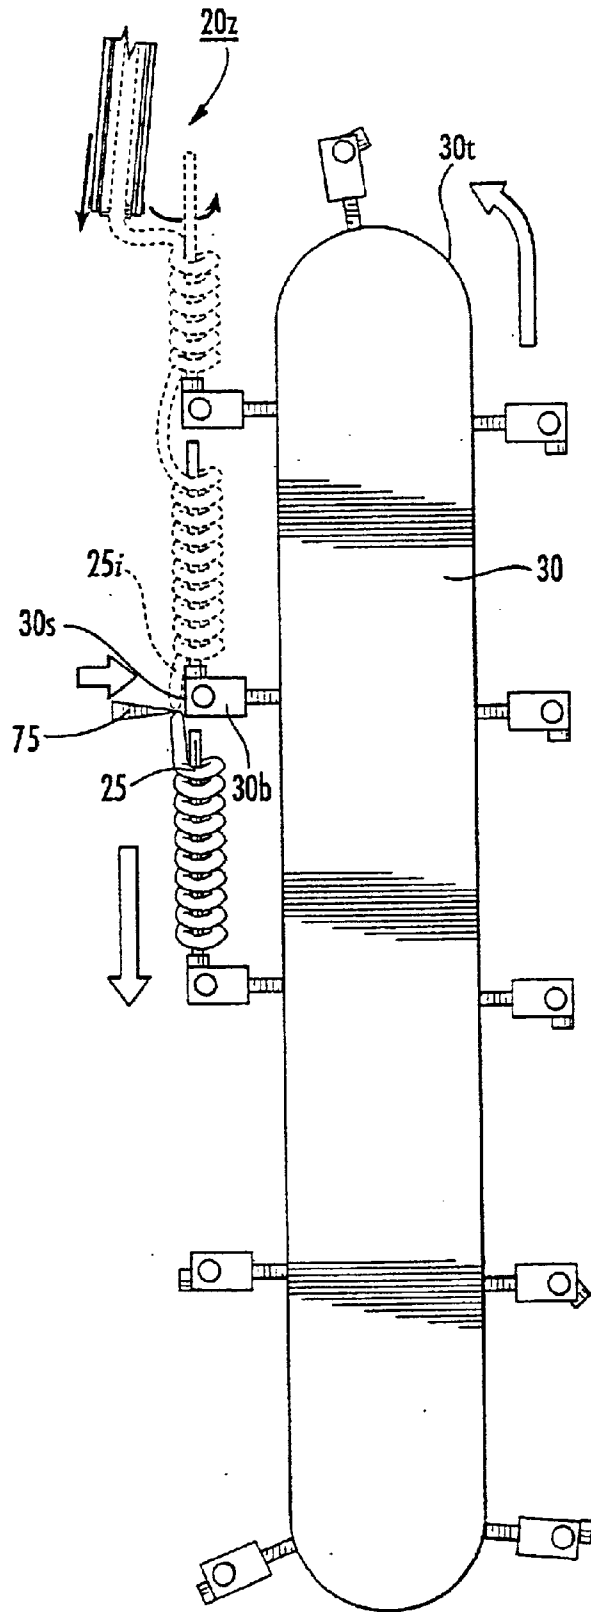


FIG. 8.

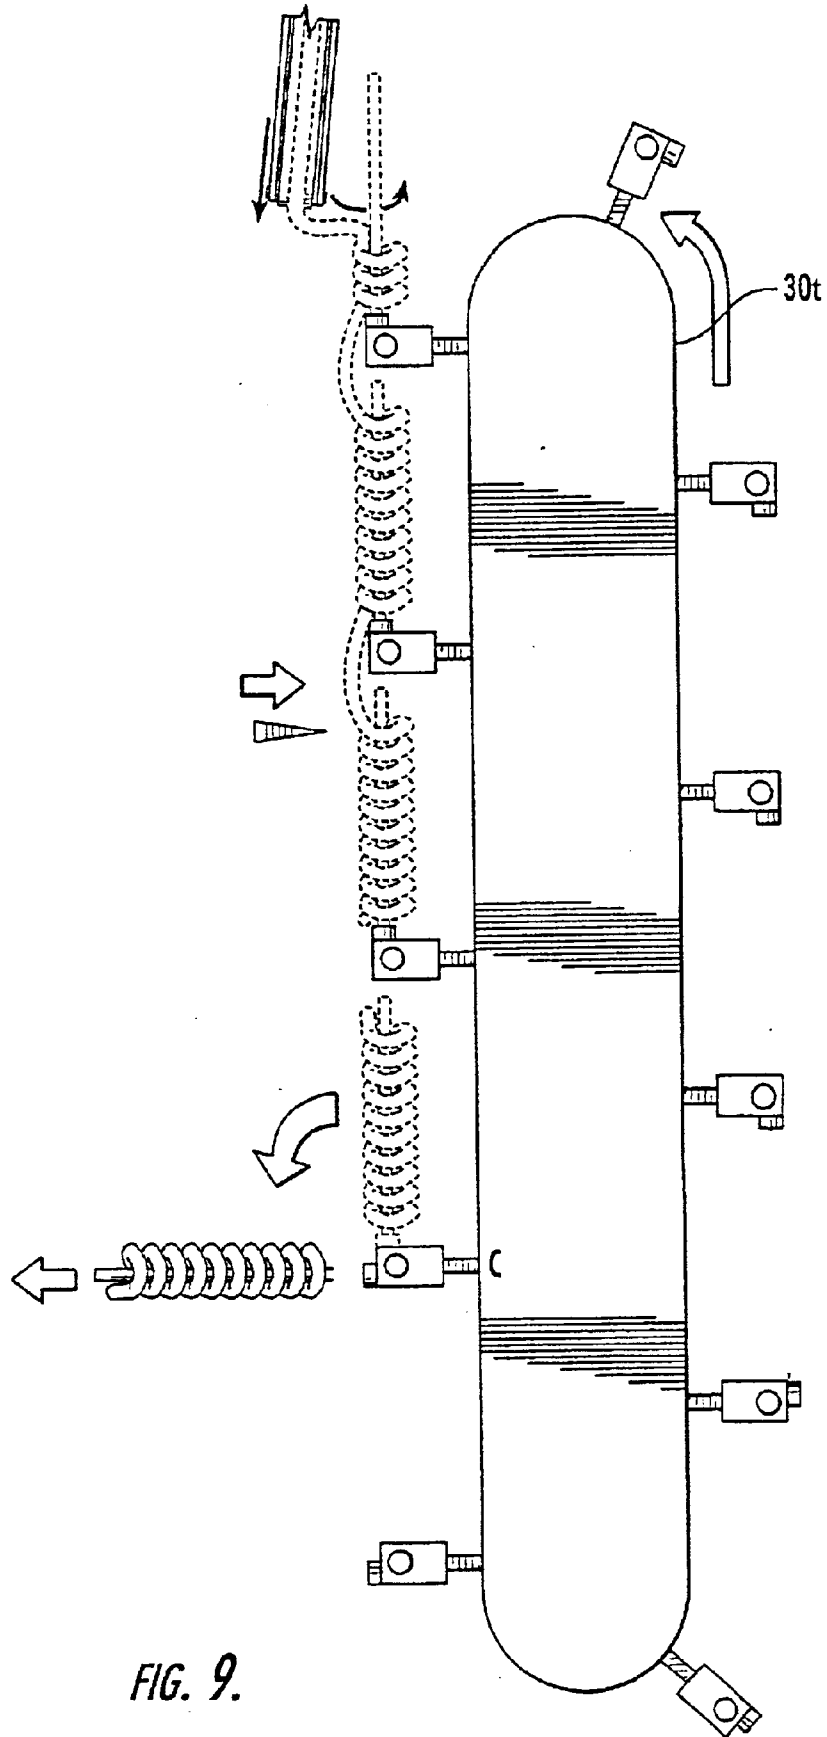


FIG. 9.

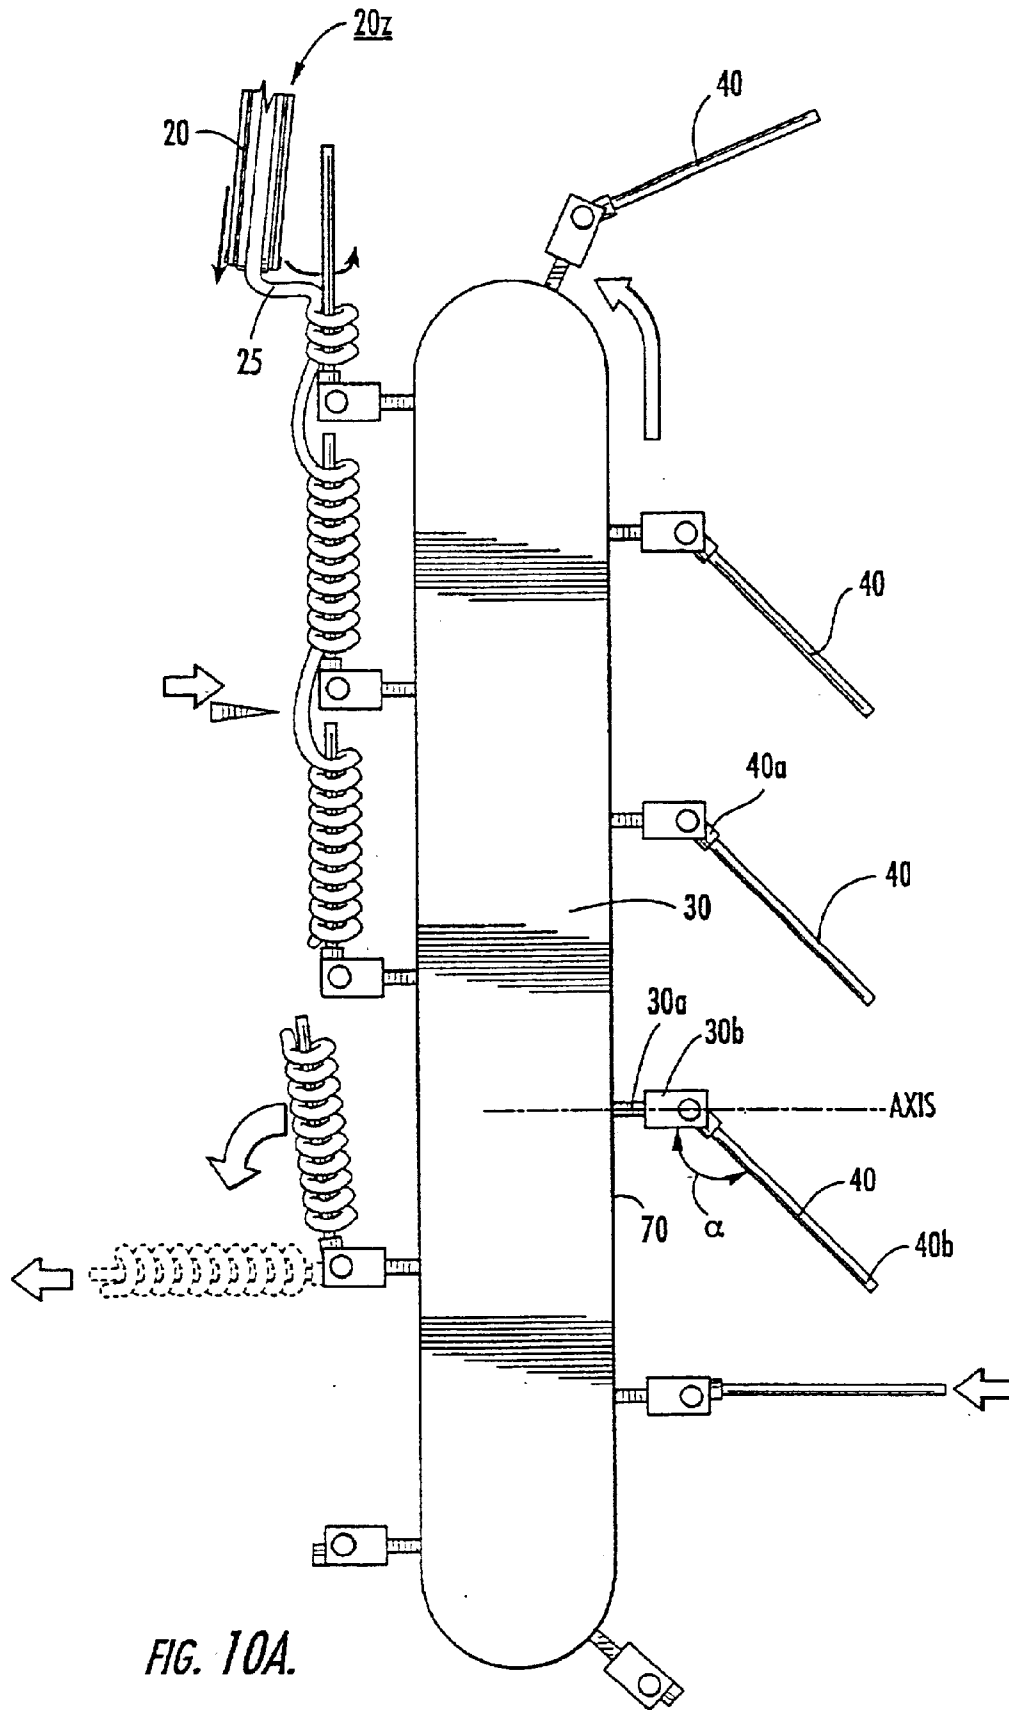


FIG. 10A.

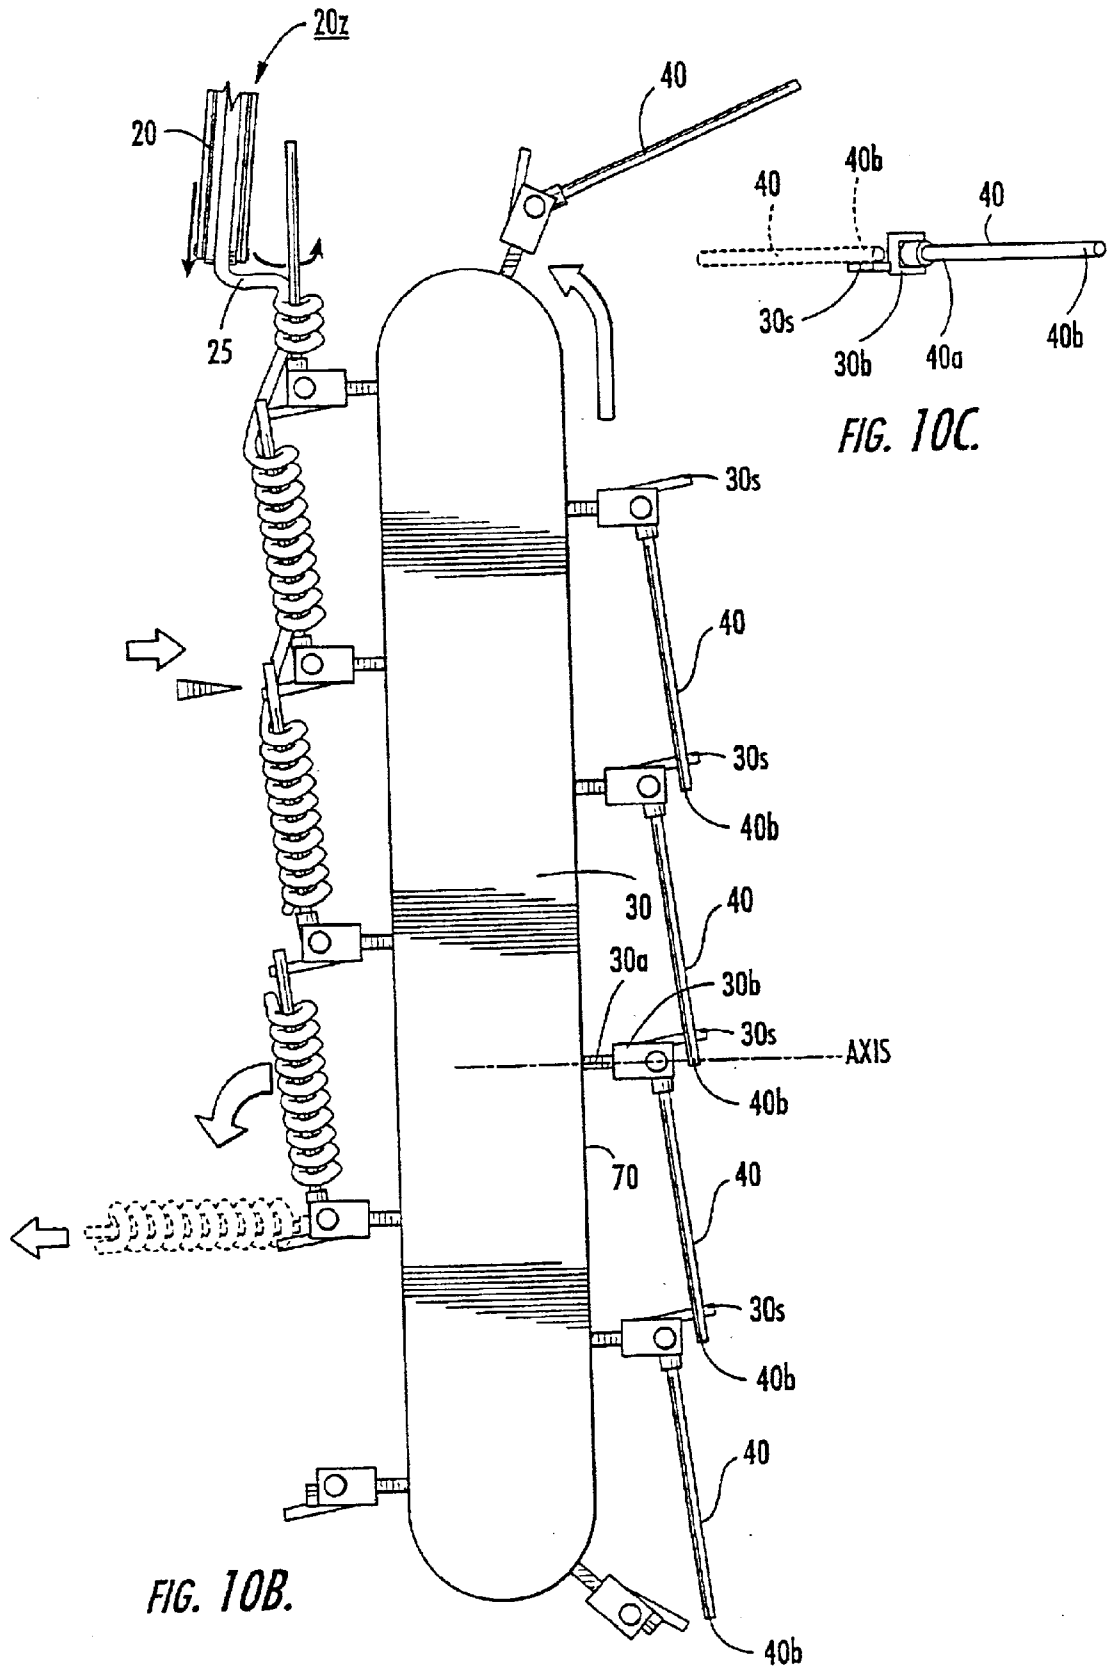
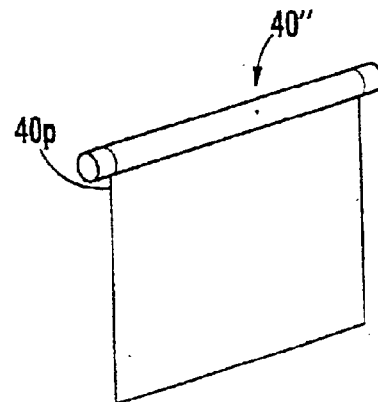
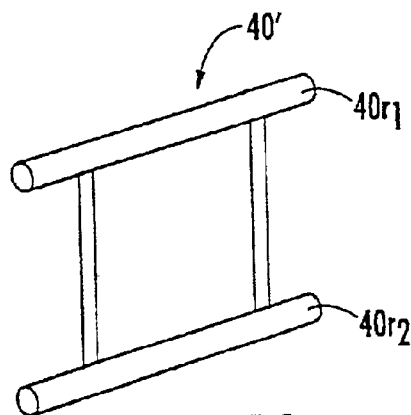
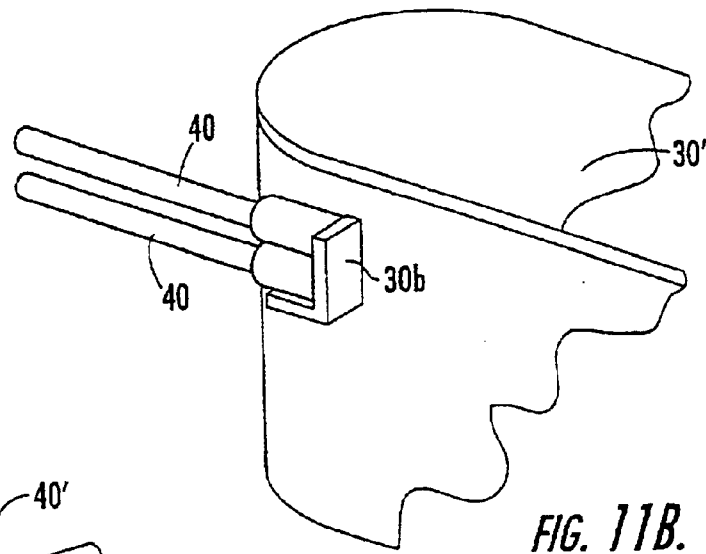
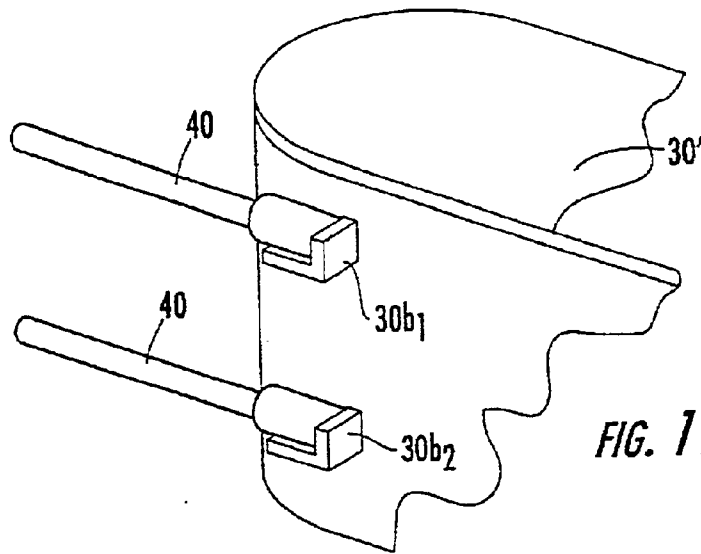


FIG. 10B.

FIG. 10C.



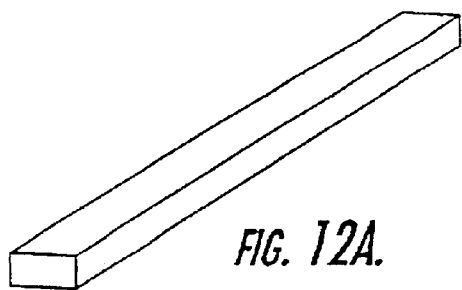


FIG. 12A.

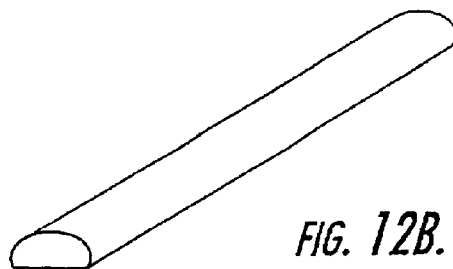


FIG. 12B.




FIG. 12C.




FIG. 12D.




FIG. 12E.

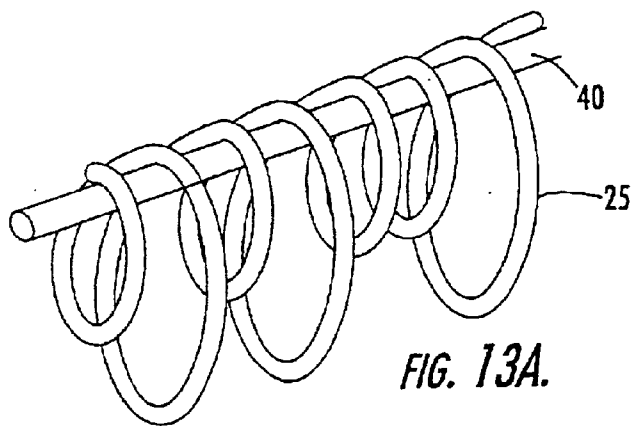


FIG. 13A.

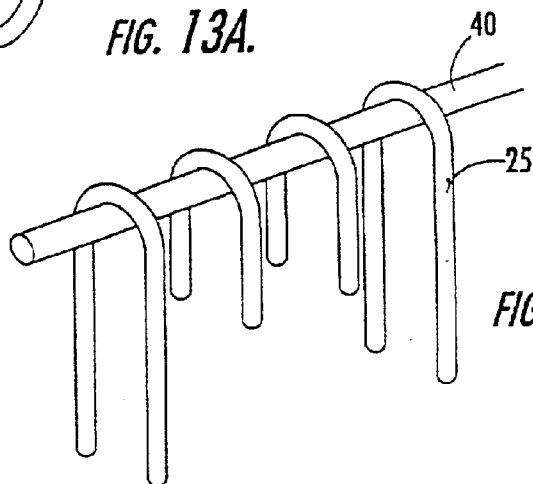


FIG. 13B.

AUTOMATED SUPPORT MEMBER POSITIONING AND REMOVING SYSTEMS AND RELATED DEVICES AND METHODS

RELATED APPLICATIONS

This application claims priority from U.S. Provisional Patent Application Ser. No. 60/370,874 filed Apr. 8, 2002, the contents of which are hereby incorporated by reference as if recited in full herein.

FIELD OF THE INVENTION

The present invention relates to movement or transfer of product within processing facilities and is particularly suitable for automatically positioning rods or product support members proximate automated loaders of lengths of products, such as extruded or stuffed food products, in food preparation and production systems.

BACKGROUND OF THE INVENTION

Conventionally, extruded or stuffed food products such as pasta, dough, and meats such as hot dogs, links, or sausages, can be processed so that the desired food material is extruded or mixed and prepared, then propelled through a "stuffer machine" that includes a stuffing nozzle, extrusion machine, or co-extrusion machine. In operation, in certain food items, as the food moves through the stuffing nozzle or extrusion head, a natural or synthetic casing is disposed about and/or deposited or wrapped around the external surface of the food material to form a continuous length of encased elongated food product. To form certain products (such as hotdogs and sausages), the casing can be twisted, tied, nipped, and/or crimped at certain intervals, forming a chain-like string or strand of encased food product. Extruders and co-extruders are available from various commercial manufacturers including, but not limited to, Townsend Engineering Co., located in Des Moines, Iowa. Stuffers are available from various commercial manufacturers including, but not limited to, HITEC Food Equipment, Inc., located in Elk Grove Village, Ill., Townsend Engineering Co., located in Des Moines, Iowa, Robert Reiser & Co., Inc., located in Canton, Mass., and Handtmann, Inc., located in Buffalo Grove, Ill. Exemplary stuffer and/or linker apparatus are also described in U.S. Pat. Nos. 5,788,563; 5,480,346; 5,049,108; and 4,766,645. The contents of these patents are hereby incorporated by reference as if recited in full herein.

After stuffing or extruding, the encased elongated food product is expelled from the stuffer or extruder via a material discharging exit port. FIG. 1A illustrates a conventional stuffer **10** and stuffer material discharge port **10p**. The stuffer discharge port **10p** is positioned proximate a "linker" or looping and transferring device **15** (FIG. 1B) that rotates an endless chain of hooks **15h** about the discharge port **10p**. Generally described, the material discharge port **10p** is configured so that, during operation, the product is expelled and directed so that the traveling hooks, which serially travel to be adjacent the discharge port **10p**, catch a portion of the length of the product, with the result that the product forms loops on the hooks at certain intervals. More specifically, certain devices are configured so that the hooks **15h** travel to the discharge port **10p** and the discharge port **10p** discharges into a downwardly inclined channel that directs the elongated food downward and, as the hooks turn to face the discharged food, the hooks sequentially individually reach out to grasp the product at certain intervals. Other devices propel the encased product onto hooks that rotate thereabout (typically under) to catch the product at certain intervals to

transfer the encased material onto the transfer device. The hooks **15h** then suspend the product in a looped configuration (hanging in a vertical orientation) as shown in FIG. 1B, with each hook **15h** supporting a single loop of product.

FIG. 1C illustrates a slightly different prior art stuffer **10** and associated linker **15** with hooks that are oriented to rotate in a different plane from that shown in FIG. 1A (i.e., a vertical plane rather than a horizontal plane). In addition, in this prior art stuffer/linker, the discharge port **10p** terminates into a short expanse of tubing that forms a rotating discharge nozzle **10r**. The rotating nozzle **10r**, again, propels the extruded encased product onto the hooks **15h**.

After the product is suspended on the hooks **15h**, a rod or stick is typically manually inserted through the suspended looped product above the hooks and below the upper looped portion of the food, and the product is manually lifted up and off the hooks **15h** and transferred to a trolley, oven, or other food processing station.

In view of the foregoing, there is a need to provide automated processing systems that can improve the production process to facilitate the loading of food receiving members such as sticks and/or reduce the need for manual labor to load sticks.

SUMMARY OF THE INVENTION

Certain embodiments of the present invention provide automated positioning and removal systems of food support members that can automate the loading of empty and/or the removal or subsequent downstream transfer of filled or loaded food support members. The food support members can be portable and adapted to hold, carry, and transfer, away from the extruder/stuffer, the elongated, extruded, and/or stuffed product. The food support members can be used to directly capture and hold the product at the extruder/stuffer discharge port and then to deliver the product to a trolley or desired workstation or equipment. The food support members may be elongated, such as bars, rods or sticks.

In certain embodiments, the positioning and removal systems provided by the present invention can be configured with a carousel portion that can substantially continuously provide a series of unloaded (empty) rods to a loading station and then automatically take-away the rods from the loading station when they are loaded with looped product. The positioning and removal systems may be configured as endless systems with a fixed travel path associated with a predetermined travel track that, in operation, continuously serially advances the rods. The positioning and removal systems may be particularly suitable for use with automated winders as described more fully in co-pending U.S. Provisional Application Ser. No. 60/362,375 filed Mar. 7, 2002, the contents of which are hereby incorporated by reference as if recited in full herein.

The loading station may include a winder with a winding arm that extends a distance away from the discharge port of an upstream stuffer or extrusion apparatus. The arm can be configured to repetitively translate a vertical distance so as to travel above and below (and or side to side about) a suitably aligned rod or transfer member that is automatically located in the loading zone. The arm may be configured to move up and down and/or forward and rearward or across the aligned transfer member. In certain other embodiments, the arm can rotate in a substantially circular, oval, elliptical, or other desired motion. The generated motion may be a closed loop path that has two different directions of travel, such as a motion that includes both x and y axis directional components. The rod or food transfer or support member

may be configured to automatically unidirectionally (linearly) translate forward as the arm translates (moved either forward or backward toward or away from the stuffer discharge port) so that the automated winder can wrap discrete lengths or loop distributed multiple loops of the released product starting at one end portion of the transfer member and terminating at the opposing end portion so that substantially the entire length (or a desired length) of the transfer member is covered with a continuous length of looped product.

In other embodiments the winder can load discontinuous lengths of product, shown as a plurality of cut lengths of elongated product that are straddled onto and/or draped over the support member. In either case, the product can be loaded onto the support member such that the strands have substantially the same suspended lengths, or to have varying lengths, along the same or different rods or support members.

The rod or transport member can be one, or more, portable stick members upon which the wrapped continuous length product is suspended in a looped arrangement, each loop can have a substantially uniform length or different lengths.

A first aspect of the invention is a method for supplying support members to a product loading station and automatically removing loaded support members therefrom. The method includes: (a) advancing, in serial order and in spaced-apart relationship, a plurality of elongated support members having opposing first and second ends and an associated length, along a selected travel path to a loading station; (b) loading each of the elongated support members individually with a respective continuous length of elongated product formed into multiple loops or a plurality of discrete lengths of suspended elongated product at the loading station; and (c) advancing the loaded elongated support members away from the loading station along the selected travel path to cause the loaded elongated support members to travel downstream of the loading position.

In certain embodiments, the selected travel path includes a linear portion, and the loading step is carried out while the respective elongated support member being loaded is continuously advancing forward along the linear portion of the selected travel path. The travel path may also include a curvilinear portion.

Other embodiments are directed to apparatus for supplying support members to a product loading station and automatically removing loaded support members therefrom. The apparatus can include: (a) advancing means for advancing, in serial order and in spaced-apart relationship, a plurality of elongated support members having opposing first and second ends and an associated length, along a selected travel path to a loading station; (b) loading means for loading each of the elongated support members individually with a respective continuous length of elongated product formed into multiple loops or a plurality of discrete lengths of elongated product at the loading station; and (c) advancing means for advancing the loaded elongated support members away from the loading station along the selected travel path to cause the loaded elongated support members to travel downstream of the loading position.

Other embodiments are directed to an automated elongated support member supply and removal system. The system includes: (a) a central platform member; (b) a travel track mounted to the platform member that, in operation, is configured to advance continuously about an endless path about the platform member; (c) a plurality of mounting brackets, each individually mounted to said travel track in

spaced apart intervals, the mounting brackets being configured to travel along the endless path; and (d) a plurality of elongated support members, each having an end portion configured to releasably attach to a respective mounting bracket.

Still other embodiments are directed to an automated loading system. The system includes: (a) a plurality of elongated support members having a length and sized and configured to hold multiple loops or a plurality of discrete lengths of an elongated product thereon; (b) an automated winder configured to be cooperatively positioned and aligned with the discharge port of an extrusion/stuffer device configured to discharge-elongated product therefrom, the automated winder comprising; and (c) an automated apparatus for continuously presenting and positioning in serial order a respective one of the plurality of elongated support members to the winding arm so that the winding arm is positioned in spaced apart cooperating alignment with the elongated support member and is able to load the support members with a plurality of loops of the elongated product. The automated winder includes: (a) an elongated arm having an associated length that is about equal to or greater than the length of the elongated support member, said elongated arm having opposing first and second end portions, wherein, in position, said first end portion is adapted to receive an elongated product thereon from the extrusion device, wherein said second end portion is configured to release the elongated item therefrom after the item travels greater than a major portion of the length of the arm in a direction that is away from the extrusion/stuffer device; and (b) a winding mechanism attached to said elongated arm, said winding mechanism being configured to cause said elongated arm to travel repetitively in a desired motion so that, in operation, the winding mechanism causes the elongated product to wind serially about one of the support members as it is released from the second end portion of the arm.

In certain embodiments, the automated apparatus continuously translates the elongated support member away from the extrusion/stuffer device during operation so as to distribute multiple loops of or a plurality of discrete lengths of suspended product over a desired length of the support member.

In particular embodiments, the transfer support member is linearly translated forward away from the extrusion or stuffer device during loading so as to receive the wound product so that it is distributed over a desired length of the support member. The wound product may be arranged in substantially uniform looped or draped lengths of product hung or suspended from the transfer support member. The system may be arranged so that over a desired time period, the winder is substantially continuously operated to load a plurality of support members that are serially aligned with the arm for a desired interval of time so as to successively transfer and wind elongated product thereon.

Further, in certain embodiments, the transfer support member(s) is a stick or rod that can mount to conventional trolleys and/or be used to support the elongated product at the next active workstation that may be an oven, a smoker, a curer, or other food preparation/processing station.

These and other objects and aspects of the present invention are explained in detail in the specification set forth below.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a perspective view of a prior art extruded food stuffer and associated linker or transferring and looping device.

FIG. 1B is an enlarged view of the looping hooks of the device shown in FIG. 1A showing an elongated extruded encased food product suspended thereon.

FIG. 1C is a perspective view of another prior art stuffer and linker.

FIG. 2A is a perspective view of a portion of an automated rod positioning system and loading station according to embodiments of the present invention.

FIG. 2B is a perspective view of a portion of an automated rod positioning system and loading station according to alternative embodiments of the present invention.

FIG. 3 is a schematic top view of an exemplary rod loading and/or positioning and removal system according to embodiments of the present invention.

FIGS. 4-9 are schematic top views of a sequence of operations illustrating the movement of a single rod along its predetermined travel path showing empty (FIGS. 4-6) and loaded (FIGS. 8 and 9) configurations or combinations thereof according to embodiments of the present invention.

FIG. 10A is a schematic top view of an alternative configuration of an automated positioning and removal system for supplying a continuous supply of empty rods for loading according to embodiments of the present invention.

FIG. 10B is a schematic top view of an alternative configuration of an automated positioning and removal system for supplying a continuous supply of empty rods for loading according to embodiments of the present invention.

FIG. 10C is a side view of a portion of a mounting configuration for a support member shown in FIG. 10B according to embodiments of the present invention.

FIG. 11A is a perspective view of a portion of an apparatus that can hold, advance, and concurrently position pairs of elongated support members according to embodiments of the present invention.

FIG. 11B is a perspective view of a portion of an apparatus that can hold, advance, and concurrently position pairs of elongated support members according to other embodiments of the present invention.

FIG. 11C is a perspective view of another alternative configuration of an elongated support member according to embodiments of the present invention.

FIG. 11D is a perspective view of an additional alternative configuration of an elongated support member according to embodiments of the present invention.

FIG. 12A is a perspective view of an additional alternative configuration of an elongated support member according to embodiments of the present invention.

FIG. 12B is a perspective view of an additional alternative configuration of an elongated support member according to embodiments of the present invention.

FIG. 12C is a cross-sectional view of an elongated support member according to embodiments of the present invention.

FIG. 12D is a cross-sectional view of another elongated support member according to embodiments of the present invention.

FIG. 12E is a cross-sectional view of an additional elongated support member according to embodiments of the present invention.

FIG. 13A is a side view of a loaded support member according to embodiments of the present invention.

FIG. 13B is a side view of a loaded support member according to embodiments of the present invention.

DESCRIPTION OF EMBODIMENTS OF THE INVENTION

The present invention will now be described more fully hereinafter with reference to the accompanying figures, in

which embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Like numbers refer to like elements throughout.

5 In the figures, certain layers, components or features may be exaggerated for clarity, and broken lines illustrate optional features or operations unless specified otherwise. The sequence of operations (or steps) is not limited to the order presented in the claims unless specifically indicated otherwise.

10 In the description of the present invention that follows, certain terms are employed to refer to the positional relationship of certain structures relative to other structures. As used herein, the term "forward" and derivatives thereof refer to the general or primary direction that food travels as it moves inside a food processor from a processing point or region to the next processing point or region; this term is intended to be synonymous with the term "downstream," which is often used in manufacturing environments to indicate that certain material being acted upon is farther along in the manufacturing process than other material. Conversely, the terms "rearward" and "upstream" and derivatives thereof refer to the directions opposite, respectively, the forward and downstream directions.

15 The automated apparatus, systems and methods of the present invention may be particularly suitable to provide a substantially continuous supply of empty food support members such as rods for automated loading with elongated food items. When "loaded," the support members or rods can support multiple loops of food as the food is transported downstream onto a trolley, car, or the next desired workstation. The elongated support member 40 (FIG. 2A) can have any suitable configuration with a length sufficient to hold the desired amount of product thereon. Examples of elongated support members include, but are not limited to, bars, rods, or vertically spaced connected or independent pairs of bars or rods. The support member may be a substantially straight elongated rod or bar having a circular cross-section with a non-disrupted or continuous outer perimeter surface or may be otherwise configured as will be discussed further below. However, it will be appreciated by those of skill in the art that the present invention encompasses a number of different configurations that can act as suitable support members and the present invention is not limited to the embodiments described herein. In addition, in operation, a plurality of elongated support members, of the same or different configurations, may be sequentially serially loaded and removed from the automated positioning apparatus. The product may be loaded in substantially even lengths of loops or in uneven lengths of loops, or combinations thereof, over each or particular ones of the support members.

Examples of elongated food items include, but are not limited to, elastic or partially elastic food items such as cheese (e.g., mozzarella strands), dough (for incubation), pasta, meat sticks or strands, licorice or other strands of candy, and meat products. Of course, the processing system can be configured to wind or transfer other items. For example, other elongated products include candles, ropes, cables, wires, hose, tubing, and the like.

20 In certain embodiments, the present invention is used to transfer and load a length of an elongated extruded product held in a casing onto a support member. The casing can be any suitable casing (edible or inedible, natural or synthetic) such as, but not limited to, collagen, cellulose, plastic, elastomeric or polymeric casing. The elongated product can be an elongated meat product. Exemplary meat products include, but are not limited to, strands of meat (that may

comprise pepperoni, poultry, and/or beef or other desired meat), processed meat products such as strand(s) or continuous lengths of meat sticks (including whole or partial meat mixtures), sausages, hotdogs, and the like. The term “continuous” is used interchangeably with “contiguous” to mean that the product is connected or joined (directly or indirectly) over its length.

The elongated product can be configured as a continuous length of product having a length of at least about 20–25 feet per strand, and typically at least about 50 feet. In other embodiments, the length continuous product may be up to about 150–200 feet, or even longer. The elongated product may be segmented or non-segmented, i.e., a length of chain-like linked items, or a strand or multi-stranded length of non-chain linked product. Other embodiments may load the elongated product in a series of non-looped discrete lengths. The discrete lengths may be any desired length or combinations of lengths, such as, but not limited to, lengths between about 1–20 feet.

The elongated food item may be elastic (at least in tension) so as to allow some stretching without unduly altering or deforming its desired shape and/or cross-section during processing. The elongated food item may be an extruded product that is held in a natural or synthetic casing as noted above. Other embodiments contemplate product that have rigid configurations but are movable link to link, such as chains of material having sufficient rigidity to retain its shape during processing and/or use (formed of a solid or composite metal, polymer, and/or plastic and the like).

In operation, in certain embodiments, the elongated product may have an exterior surface that, during the loading process, exhibits increased friction relative to a finished, cured, or dried configuration. For example, a processed meat mixture that is held in a collagen casing, prior to finishing, can be described as having a relatively gelatinous, sticky external residue that can cause the food to attempt to stick to a support surface.

Turning now to FIG. 2A, one embodiment of an apparatus **30** for automatically providing, presenting, and/or positioning elongated support members **40** for loading is shown. The apparatus **30** is configured to hold and move serially, a plurality of spaced-part elongated support members **40** along a desired travel path **50** that is defined by a travel track **30t** associated with the platform or carousel of the apparatus **30p** which the members **40** follow. As shown, the automated apparatus **30** can be configured such that a portion is adjacent a product loading zone **20z** that discharges elongated continuous lengths of product **25** therefrom. The apparatus **30** can be configured to serially automatically present (align and/or position) the support members **40** such that they are in cooperating communication with the loading equipment in the loading zone **20z**.

The apparatus **30** includes a plurality of mounting brackets **30b** that are operatively associated with the track **30t**. The mounting brackets **30b** are held in spaced apart intervals or locations about the track **30t** or perimeter of the apparatus **30** and are configured to receive and releasably secure the end portion **40a** of the elongated support member therein.

The mounting brackets **30b** can hold the end portion **40a** in a manner that allows the member **40** to pivot about a pivot joint **30p**. The mounting brackets **30b** are operatively associated with the track **30t** that advances and moves the mounting brackets **30b**, which, in turn, move the respective elongated support members **40**, about the travel path **50**. The mounting brackets **30b** may be outwardly extending to allow for ease of alignment during loading. In other embodiments,

the mounting brackets **30b** may be flush with the track or mounted inwardly of the apparatus (not shown).

The track **30t** of the apparatus **30** may be endless and/or curvilinear as shown in FIG. 3. As is also shown in FIG. 3, the elongated members **40** can be configured to travel only a portion (typically a major portion) of the length of the track **30t**. In the embodiment shown, empty support members **40** can be introduced individually at a first location “A” disposed upstream of a loading zone **20z** and the loaded or filled support member **40** can be removed at second location “C”, located downstream of the loading zone **20z**. As such, the brackets **30b** may travel without support members for a minor portion of the track **30t**. Other track and path configurations may be employed and a common location or a plurality of entry/exit locations maybe used so that the elongated members **40** travel the entire or a subset of the length of the track **30t** (not shown).

As noted above, a first end portion **40a** of the elongated support members **40** can be pivotably attached to the apparatus **30** so that each is able to independently move with respect thereto. In operation, as shown in FIG. 3, this mounting configuration allows the second end portion **40b** of the members to retract toward or extend away from the track **30t** (toward and/or away from the carousel body or platform **30p** of the apparatus) during operation.

The track **30t** may be operatively associated with an advancement or drive system that moves the brackets **30b** forward along the track or desired travel path. As such, the advancement system can comprise one or a series of conveyors, belts, cables, or chains, gearing, cams, or mechanical, electrical, pneumatic, hydraulic powered mechanisms, linkage assemblies, or combinations of same, as well as other suitable drive means and/or transport mechanisms.

In certain embodiments, the support members **40** travel substantially continuously at a substantially constant speed along a major portion, or all, of the travel path **50**. In other embodiments, the members **40** may operate at a variable speed, or intermittently slow or halt to interrupt forward movement so as to allow the support members **40** and/or brackets **30b** to dwell at a particular location for a desired amount of time.

FIG. 3 also illustrates that the elongated support member **40** can move from a first location “A” where it has a first orientation such that the elongated support member **40** is held substantially orthogonal to the direction of travel associated with the predetermined travel track **30t** to a second location “B” with a different orientation. At location “B”, as shown, the elongated support member **40** is held substantially parallel to the direction of travel associated with the predetermined travel track **30t**. At location “C”, the member **40** may be again rotated to be substantially orthogonal to the direction of travel associated with the travel track **30t**. Location A may be associated with a new or “empty” member loading or supply station **120** (represented by the insertion arrow **120i**), and location C may be associated with a loaded or “full” member removing station **121** (represented by the detachment arrow **121d**). As such, the elongated support members **40** are individually releasably mounted to mounting brackets **30b** spaced apart a distance so as to define the spacing between adjacent members **40** during operation. In use, “fresh” sanitized/sterilized support members **40** are individually introduced at one or more locations (shown as a single location A), and individually removed at one or more locations (shown as a single location B) after the members **40** are loaded.

In other embodiments, the elongated support members **40** can be configured to permanently mount to the track **30r** and/or carousel **30** so as to repeatedly travel the circuit. In this embodiment, the food can be unloaded at a desired unloading station or stations, manually or automatically. “Permanently” as used herein means that the members **40** may be used repetitively during a production shift, remaining mounted, without requiring removal from the device **30**. However, selected ones or all members **40** may be removed for periodic repair or cleaning as desired.

As shown in FIGS. 2A and 3, the loaded members **40** may be interconnected with intermediate lengths of product **25i** strung between adjacent ones of the elongated support members **40**. In such embodiments, as shown in FIG. 3, it may be desirable to cut the product along the intermediate segment **25i**. FIG. 3 illustrates that such cutting may be carried out automatically with a cutting implement **75** configured to advance and cut the product **25** at desired time intervals set to correspond to the speed of the elongated members **40** so that adjacent members are detached and/or unconnected.

FIG. 2A illustrates that, in position in the loading zone **20z**, the support member **40** is located in cooperating alignment with the loader that discharges the product onto the support member. As shown, the loader is a winder arm **20**. However, other loader, discharge configurations, mechanisms, and devices may also be used to supply the product desired to be loaded.

As shown, the support member **40** extends within the perimeter of the travel path **20p** defined by the translating winder arm **20**. In certain embodiments, the support member **40** can be located so that it is centrally located within the boundary of the movement of the arm **20** during the loading operation. In other embodiments, the transfer member **40** can be asymmetrically positioned (such as closer to the top, bottom or one side of the winder arm **20**). The direction of travel of the arm **20** is shown as counterclockwise in FIG. 2A, but may be configured to be clockwise as well. The support member **40** may be configured to travel proximate the loading zone **20z** and downstream thereof in a unidirectional manner as the winder arm **20** translates to distribute multiple loops of product along a desired length of the support member **40**. The timing, movement pattern, and product release rate, can be coordinated with the spacing of the support members **40** and the speed of movement of the support member **40** in the apparatus **30** to substantially continuously feed serially presented empty support members into the loading zone **20z** after an immediately forward one is full and departs the loading zone **20z**.

As shown by the arrow in FIG. 2A, the winder arm **20** can move in a predetermined directional pattern **20p** which is a closed path including two different axis of travel, typically including both X and Y axis directional components. The closed path may be shaped in any desired suitable configuration, including, but not limited to, oval, teardrop, circular, elliptical, hourglass, square, or rectangular, so that, in operation, it causes the elongate product to wrap to the desired configuration. FIG. 2B illustrates that the winder arm **20** may be configured to move in a transverse (open or closed) pattern **20p** so as to serially load or drape over the member **40** discrete lengths of non-looped elongated suspended lengths of product along the support member **40**.

The elongated continuous or discrete length of product may be loaded so that it has substantially uniform suspended lengths along the member **40** as shown in FIG. 2A or 2B or may be loaded to provide non-uniform suspended lengths of product **25** (FIGS. 13A, 13B).

The winder arm **20** may be programmably configured to alter its winding pattern, winding speed, and the like, depending on the product being processed. In any event, the winder arm **20** is configured to move a sufficient distance above and below the support member **40** so as to load or loop the elongate product **25** thereon.

In certain embodiments, the upstream processing station that feeds the winder arm **20** can be the extruder **10** (such as the conventional extruders shown in FIGS. 1A–1C) and the upstream portion of the winder arm **20** can be positioned proximate to, and in cooperating alignment with, a discharge port **10p** of the extruder (or stuffer) **10** or intermediately positioned member such as a chute.

In operation, as shown in FIGS. 2A, 2B the elongated support member **40** can be aligned with the winder arm **20** at a first position that is toward the upstream end of the arm **20** and during loading can be gradually translated (typically unidirectionally) to be closer to the downstream end of the arm **20** all at substantially the same height so that the support members **40** are held in a substantially level manner during and after loading. Moving the support member **40** during the loading operation can distribute multiple loops of product over the desired length of the member **40**.

In certain embodiments, the support member **40** moves at a substantially constant speed along the track **30r** that may be synchronized and/or responsive to one or more of the speed of the winding (speed of the arm), the speed of forward movement of the product **25** as it exits the arm **20**, and the desired looping arrangement/configuration (length of the loops or suspended lengths) on the member **40**.

The length of the winder arm **20** can vary depending on various factors, such as, but not limited to, the size of the product, the forward speed of the product, the desired winding pattern and the like. In certain embodiments, the length of the arm **20** is sized to be at least the length of the transport member **40**. In other embodiments, the length of the support member is at least about 2 feet, and typically at least about 3 feet. In certain embodiments, the support member **40** can be about six feet long.

Various automated detectors can be placed at desired locations along the apparatus **30** and/or winder arm **20** to verify proper operation and to render an alert when an abnormality is indicated. Examples of such detectors include optical detectors (infrared or otherwise that respond to changes in visual intensity or generated light beams), flow meters, pressure meters, temperature sensors, and the like.

In certain embodiments, the speed of the track **30r** and/or support members **40** held and advanced by the apparatus **30** may be between about 2–10 ft/min, and in particular embodiments, at about 4–6 ft/min.

FIGS. 4–9 illustrate a sequence of operations following a single support member **40** through an exemplary travel path provided by the positioning apparatus **30**. FIG. 4 illustrates the initial loading or supplying of a (empty) support member **40** onto the apparatus **30** at the supply station **120**. In this embodiment, the support member **40** is loaded into the bracket **30b** at an introduction location (shown as position A) in an orientation that is different from its upstream orientation. As shown by the curvilinear arrow, the track **30r** continues to move the receiving bracket **30b** forward during the supply step, automatically bringing the next adjacent bracket **30b** forward to repeat the loading process.

FIG. 5 illustrates that after or during insertion (proximate, and typically, downstream of location A) into the bracket **30b**, the support member **40** can be reoriented and aligned so that the outer portion **40b** of the support member **40** can

be rotated inwardly. In the embodiment shown, the support member **40** pivots so that it is disposed substantially parallel to and evenly spaced with respect to the track **30r** or apparatus **30** along the length of the support member **40**. At full operational capacity, the apparatus **30** positions the support members **40** so that each is spaced apart but adjacent the support members **40** that are positioned immediately forward and rearward thereof about a major portion of the track **30r** as shown in FIG. 3.

FIG. 10A illustrates that the support members **40** may be held by the apparatus **30** such that when viewed from the top, they present an angular orientation relative to the carousel **30**, so that the first portion **40a** is held closer to the track **30r** than the second portion **40b**. As shown in FIG. 10A, as viewed from the top, the support members **40** can be held during a portion of travel along the travel path at an obtuse angular orientation " α " that is greater than 90 degrees, typically from about 120–160 degrees, from the axis defined by an axis line (shown in broken line) extending through the bracket arm **30a** and associated pivot joint. In other embodiments, the support members **40** may be held to be in substantially straight alignment throughout a major portion of the travel circuit. As shown in FIG. 10B, the support members **40** may be mounted on the carousel while in other embodiments the support members may be oriented to taper inwardly relative to the travel direction (not shown).

In certain embodiments, as shown in FIGS. 2A and 2B, the support member **40** is held in the apparatus or platform so that it has a free length that can be readily accessed for loading (such as aligned and positioned) at the loading zone **20z**. As also shown in FIGS. 2A, 2B, and 4–9, one end portion **40b** can be configured to remain free during its travel along the travel path or track **30r**. In other embodiments, both end portions **40a**, **40b** of the members **40** may be held against the carousel **30** (such as via a double bracket holding arrangement) (not shown). The end portion that is held may be the end or an inward portion of the member **40**. In other embodiments, one or more mounting locations may be used as well as an intermediately positioned (between the opposing end portions) mounting location may be used.

In other embodiments, as shown in FIG. 10B, a first end portion **40a** of a support member **40** can be mounted in the bracket **30b** with a second end portion **40b** held in a secondary bracket **30s** that may be disposed on a different adjacent primary bracket **30b** (or on the track as a secondary bracket (not shown)) spaced from the first bracket **30b**. As shown in FIG. 10B, a first end portion **40a** of the support member can be held in the first bracket **30b** and the second end portion **40b** can be held on a rear bracket **30s** that may be mounted to a bracket **30b** located downstream of the bracket **30b** holding the first end portion **40a** of the support member. FIG. 10C is a side view that illustrates the secondary bracket **30s** incorporated into the holding bracket **30b**.

FIG. 10B also illustrates another example of a holding configuration and orientation for the support members **40** along the travel path. As shown, the support members **40** have a length and are in spaced apart relationship so that the rearward portion **40b** of an upstream member **40** extends proximate to or beyond the corresponding adjacent downstream bracket **30b**. In the orientation shown, the support member **40** tapers outwardly slightly from front to back, so that the rearward most portion of a forward member **40b** resides proximate to but outwardly of the boundary of the front-end portion **40a** of the adjacently located downstream or rearwardly positioned support member **40**.

The support members **40** may be manually or automatically turned to a desired orientation or orientations along the

travel path. In certain embodiments, a guide mechanism (not shown) can be disposed downstream of the introduction location A (FIG. 4) that deflects the support member **40** to a desired orientation. In other embodiments, the bracket **30b** can be configured with a cam, linkage, or other internally mounted mechanism (not shown) that is operated to cause the support member **40** to turn to a predetermined orientation(s) as it travels along the track **30r**.

FIG. 6 illustrates, in broken line, a series of orientations that the support member **40** moves through as it travels in the arcuate region of the travel path to be aligned and positioned in cooperating relationship with the loading zone **20z**. It is noted that where the apparatus **30** has only linear tracks, such a pattern will not be required (not shown).

FIG. 7 illustrates that in certain embodiments, as the member **40** progresses forward at and/or away from the loading zone **20z**, the member **40** can travel in unidirectionally. As shown, the member **40**, during and after loading with product **25**, can be held and moved so that it has a straight travel pattern with the member **40** held level (substantially horizontally to keep the loops of product distributed along the length of the member) and parallel to the travel track **30r**.

FIG. 8 illustrates that the intermediate length of product extending between two adjacent support members **40** downstream of the loading zone **20z** can be parted or split. The parting can be automatically or manually performed while the adjacent support members **40** are moving, typically without disrupting the normal speed and/or continuous flow of product/support members **40** along the track **30r**. The bracket **30b** may include an outer surface configuration **30s** that provides a solid cutting surface that is sufficient to receive the sharp edge contact of a cutting implement and/or the associated cutting force over a suitable component life. Other cutting means can also be used, including, but not limited to, lasers, ultrasonic devices, water jets, and the like.

FIG. 9 illustrates that the support member **40** loaded with product **25** can be detached from the apparatus **30** at removal location "C". The detachment can be performed while the support member **40** is held at a desired removal orientation. As shown, the support member **40** is moved so that the second end portion **40b** extends outwardly from the body of the apparatus **30** which may provide easier removal and/or external access to the loaded member **40**.

Although illustrated as having particular loading and supply member introduction and removal locations, it is noted that other locations can be selected. For example, a plurality of different introduction locations can be used, so that a particular location loads every other bracket that passes thereby. Similarly, a plurality of different removal locations can be selectively used. In other embodiments, the supply members are mounted to travel repeatedly along the circuit to allow a number of loading operations thereon and hence, remain in position during the removal (with no single introduction or loading location needed). At a desired time, the food can be lifted, scooped, or otherwise removed from the support members **40** (at one or more desired locations). It is also noted that the support member **40**, although shown as being introduced at a 90-degree orientation in certain of the figures such as FIG. 4, may employ other desirable entry or loading orientations. In addition, the support members **40** need not move into parallel alignment to the platform **30** as they travel along the track **30r**. Instead they may be loaded into this orientation and remain this configuration along a major portion of the travel path or travel in alternative orientations.

In certain embodiments, two loading stations can be positioned and opposing ends of the apparatus (not shown). In these embodiments, the apparatus **30** can be configured with a sufficient length and/or configuration to include two different sets of introduction, loading, and removal locations, potentially increasing the loading capacity.

It is also noted that, in certain embodiments, as shown in FIG. 11A, the apparatus **30'** may be configured with a corresponding pair of dual brackets **30b₁**, **30b₂** at each, or selected ones, of the support member mounting positions. As such, the apparatus **30'** can be configured to receive a pair of independent overlying aligned elongated support members **40** that are held in the apparatus **30'** to be vertically spaced apart and concurrently moved to be simultaneously loaded with product. In this embodiment, the winder arm **20** moves a distance in its winding pattern that is sufficient to envelope and/or move around the perimeter defined by the two spaced apart rods, the upper one suspending the product **25** and the lower one helping to provide a lower dimension for the looped product. FIG. 11B illustrates that a pair of support members **40₁**, **40₂**, may be held in a single bracket **30b** that defines the alignment orientation and pivotability of the members **40**.

FIGS. 11C–11E illustrate examples of alternate embodiments of support members **40**. As shown in FIG. 11C, the support member **40'** may be configured as a pair of rods **40r₁**, **40r₂** that may be attached. FIG. 11D illustrates that the support member **40''** may be configured with a continuous sheet of material, the upper portion may have additional width and/or at least one end portion (shown as two) that allows for insertion into the bracket **30b**. The body of the support members may be solid, perforated, foraminated, or include one or a plurality of apertures or be otherwise configured to reduce weight and/or promote airflow there-through. Similarly, the member **40** may include one or more handles or other externally accessible handling means disposed along the length and/or at selected end portions thereof to promote ease of handling to transport the loaded member to a trolley or another active station (not shown).

Examples of other configurations of support members **40** are shown in FIGS. 12A–12E. These examples are non-limiting to the contemplated scope of the invention as there are many suitable support member configurations as will be appreciated by those of skill in the art. FIG. 12A illustrates that the support member **40** may be configured as a planar bar. FIG. 12B illustrates a support member **40** configured as a rod with a semi-circular cross-sectional profile. FIG. 12A illustrates that the support member **40** may include a protrusion **40pr** that is configured to mate with the bracket **30b** to help releasably secure the support member **40** to the apparatus **30**. Similarly, FIG. 12D illustrates that, at least one end portion **40b** of the support member may be configured with a plurality of outwardly extending protrusions to releasably engage with the bracket **30b**. FIG. 12D also illustrates that at least one end portion of the support member **40b** may include an aperture **40a** that may be used to help secure the support member **40** to the bracket **30b** and/or to reduce the weight thereof. FIG. 12E illustrates that at least one end portion **40b** of the support member may include a recess that can lock in position to releasably secure it to the apparatus **30**.

The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although a few exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings

and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. In the claims, means-plus-function clauses, where used, are intended to cover the structures described herein as performing the recited function and not only structural equivalents but also equivalent structures. Therefore, it is to be understood that the foregoing is illustrative of the present invention and is not to be construed as limited to the specific embodiments disclosed, and that modifications to the disclosed embodiments, as well as other embodiments, are intended to be included within the scope of the appended claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

That which is claimed is:

1. A method for supplying support members to a product loading station and automatically removing loaded support members therefrom, comprising:

advancing, in serial order and in spaced-apart relationship, a plurality of elongated support members having opposing first and second ends and an associated length, along a selected travel path to a loading station;

automatically loading each of the elongated support members individually over a generally horizontal length thereof with suspended elongated product formed into greater than three loops and/or greater than three discrete lengths of suspended elongated product at the loading station; and

automatically advancing the loaded elongated support members away from the loading station along the selected travel path to cause the loaded elongated support members to travel downstream of the loading position.

2. A method according to claim **1**, wherein the selected travel path includes a linear portion, and wherein the loading step is carried out while the respective elongated support member being loaded is automatically advancing forward along the linear portion of the selected travel path with the elongated support member held generally horizontal with the loop or discrete lengths held in close proximity to each other on the elongated support member.

3. A method according to claim **1**, wherein a portion of the selected travel path is curvilinear.

4. A method according to claim **3**, further comprising pivotably rotating the elongated support members side to side from a first orientation where the elongated support member is disposed substantially orthogonal to the direction of travel associated with the selected travel path to a second orientation wherein the elongated support member is held substantially parallel to the direction of travel associated with the selected travel path.

5. A method according to claim **4**, wherein the elongated members pivot from the first orientation to the second orientation as they advance along a portion of the selected travel path before said loading step.

6. A method according to claim **1**, wherein each elongated support member is a substantially straight rod that is at least about 2 feet long.

7. A method according to claim **1**, wherein the advancing steps are carried out automatically at a substantially constant speed.

8. A method according to claim **1**, wherein the advancing steps are performed substantially continuously to load a plurality of elongated support members.

9. A method according to claim **1**, wherein the selected travel path is generated by an associated predetermined

15

endless travel track, and wherein the elongated members travel less than the entire circuit length of the predetermined travel track.

10. A method according to claim 1, wherein the loading step comprises automatically translating a winder arm about a winder path that moves the winder arm across a top portion of the elongated support member a plurality of times as the product is looped and/or draped onto the elongated member.

11. A method according to claim 9, further comprising introducing empty elongated support members to the predetermined travel track individually at a location that is upstream of the loading station.

12. A method according to claim 9, further comprising detaching the elongated loaded support members individually from the predetermined travel track at a location that is downstream of the loading station.

13. A method according to claim 1, wherein the elongated support member is a generally straight rod that is disposed generally horizontal substantially level at a generally constant vertical height during at least the loading and subsequent advancing steps.

14. A method according to claim 1, further comprising releasably holding a first end portion of the elongated member adjacent the predetermined travel track in a manner that allows the second end portion to automatically laterally pivot during at least the first advancing step.

15. A method according to claim 1, further comprising permanently holding a first end portion of the elongated member adjacent the predetermined travel track in a manner that allows the second end portion to automatically laterally pivot during at least the first advancing step.

16

16. A method according to claim 1, wherein the loading step is carried out so that a continuous length of product extends intermediately between adjacent ones of the loaded elongated members.

17. A method according to claim 16, further comprising automatically cutting the intermediate lengths of the product to separate product loaded on one loaded member from product loaded on another adjacent loaded member.

18. A method according to claim 1, wherein the loading step is carried out by automatically winding a generally open elongate loader arm in a winder path having a perimeter associated therewith, and wherein the advancing steps are carried out so that the elongated arm travels through the perimeter of the winder path during the loading step.

19. A method according to claim 18, wherein the winder path is substantially oval.

20. A method according to claim 1, wherein the elongated product is an extruded product held in a casing.

21. A method according to claim 1, wherein the elongated product is a stuffed product held in a casing.

22. A method according to claim 1, wherein the elongated product is a meat product.

23. A method according to claim 22, wherein the elongated product is a continuous length of portioned or linked meat product.

24. A method according to claim 22, wherein the elongated product is a contiguous length of non-chain linked meat product.

25. A method according to claim 1, wherein the elongated product is a non-cased food product.

* * * * *